

Gasflag

Single channel control panel

CO₂
H₂S
Cl₂
NH₃
O₃
CO
O₂
CH₄
SO₂
CO₂
H₂S



Gasflag


Gasflag is the cost effective solution to monitoring a single flammable, toxic or oxygen gas detector. Ideal for use in applications such as filling stations, swimming pool plant rooms and boiler rooms; Gasflag provides clear indication of gas hazards in a simple to use package.

Cost effective solution to simple gas detection problems

- Low cost
- Easy to use, one button operation
- Integrated indicators and sounder
- Alarm and fault relays for switching external devices
- Accepts industry standard 4-20 mA inputs
- Normal or fail-safe relay operation
- Simple installation with minimum maintenance



Low cost control panel for monitoring any 4-20mA flammable, toxic or oxygen gas detector. Includes bright alarm LEDs and a loud sounder.

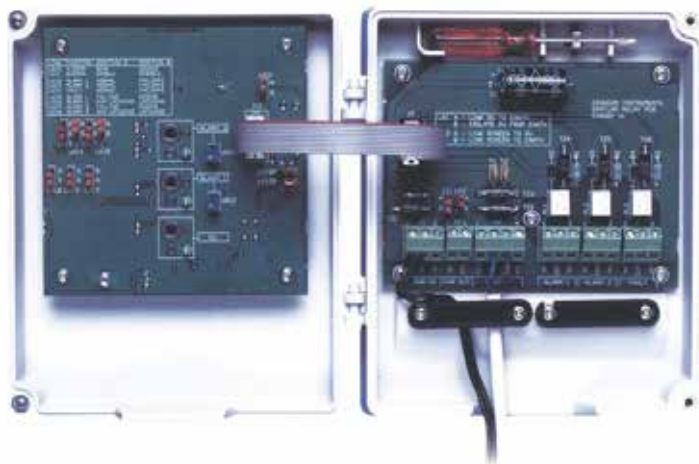

- Alarm setting adjustment controls
- Relay configuration links (rising/falling, energised/de-energised, latching/non-latching)
- Sounder activation/de-activation link
- Power terminals
- Detector terminals
- Alarm 1 relay and terminals
- Alarm 2 relay and terminals
- Fault relay and terminals

Gasflag Accessories:

- **Universal 100-240Vac to 24Vdc 750mA power supply:** The power supply is provided with four mains plug adaptors which simply clip in: UK, USA, EU and Australian type.

Specifications:

Description	Single channel control panel
Weight	<500g (1.1lb)
Enclosure material	ABS
Sensor connection	Two or three wire connection to sensor via screened cable
Operating voltage	18-28Vdc (universal 100-240Vac power supply available)
Input type	4-20 mA sink or source (selectable)
Panel indication	Power healthy - Green LED System Fault - Amber LED Alarm 1 & Alarm 2 - Red LEDs
Fault current	<3 mA and >23.5 mA (overrange fault)
Operating Temperature	-20°C to + 70°C (-4°F to 158°F)
Humidity	20-90%RH non-condensing
Trip point hysteresis	Alarm hysteresis set at approximately 0.5 mA Fault hysteresis set at approximately 0.2 mA
Response time (typical)	Time to alarm <1 second
Connections	Terminals accept cables of cross sectional area 0.5 to 2.5mm ²
Relay outputs	Single pole change-over for use with dc signals The relay contacts are rated 1A at 30V dc
Standards	EN50270 - Gas detection EMC standard
Ingress Protection	IP20

Crowcon reserves the right to change the design or specification of the product without notice.

A HALMA COMPANY



UK: 2 Blacklands Way, Abingdon Business Park, Abingdon, OXON, OX14 1DY
+44 (0) 1235 557700 sales@crowcon.com

US: 21 Kenton Lands Road, Erlanger, Kentucky 41018-1845
+1 859 957 1039 salesusa@crowcon.com

NL: Vlambloem 129, 3068JG, Rotterdam
+31 10 421 1232 eu@crowcon.com

SG: Block 194 Pandan Loop, #06-20 Pantech Industrial Complex, Singapore, 128383
+65 6745 2936 sales@crowcon.com.sg

CN: Unit 316, Area 1, Tower B, Chuangxin Building, 12 Hongda North Road,
Beijing Economic & Technological Development Area, Beijing, PRC 100176
+86 10 6787 0335 saleschina@crowcon.com

Area reserved for distributor stamp

CROWCON
Detecting Gas Saving Lives